



## Plastic catering kitchen\*

By providing the multifunctionality of transportation, hot and cold serving as well as a complete front cooking station in one system, the flexibility of the catering kitchen\* is unbeatable.

The airclean3d sucks vapours formed during cooking or frying directly from pot and pan level and draws them to the rear. There, grease and odour filters remove steam and odours, letting out nothing but clean air.

## Plastic catering kitchen\*


\* patent pending

The tried and tested food-distribution components **thermoport®**, **varithek®** and **thermoplates®** together create a compact, mobile catering unit for transporting, finishing and serving hot and cold dishes safely and to a high standard. The removable GN-port can be fixed on top of the plastic **thermoport®**.

This can provide the holding solution for the entire **varithek®** appliance range, **thermoplates®** and Gastronorm containers. Just one unit of the catering kitchen\* will provide full versatility and can be extended however and whenever you like – simply join on more functional units using the ck-connect basic frames - without reaching for the screwdriver!



Also, the extraction module **aircleanbox3d** (as illustrated on left) based on the tried and tested down-draught principle, can be fitted into the ck-connect air frame.

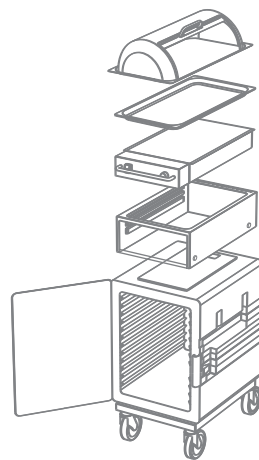

- Lid for best possible protection of dishes in the serving area
- thermoplates®, the versatile cookware: store, prepare, cook, grill, simmer, transport and serve from one receptacle
- The varithek® appliance range for any application: Ceran hob, Ceran induction hob, Ceran hot plate
- ck-port basic frames for use with all varithek® appliances, thermoplates®, Gastronorm containers and pellets. For placement on thermoport® or on the table
- Plastic thermoport® for high-quality transportation of hot and/or cold dishes
- Separate mobile frame for plastic thermoport®

**Overall dimensions (W x H x D):**  
**approx. 490 x 950 x 640 mm**

Product	Order no.	W x D x L in mm	Description
thermoport® 1000 K	85 02 04 01 orange 85 02 04 12 black	435 x 610 x 561	Plastic thermoport® without heating, weight 12 kg.
thermoport® 1000 KB, heated	85 02 04 02 orange 85 02 04 13 black	435 x 634 x 561	Plastic thermoport® with heating, weight 17.2 kg.
ck-port	84 01 11 30	370 x 575 x 170	Connector with support rails. For holding varithek® hobs and GN containers. Bolts on side and front.
ck-connect	84 01 11 28	370 x 575 x 182	Connector with support rails. For holding varithek® hobs and GN containers. Bolts on front.
ck-connect 2/3	84 01 11 32	370 x 370 x 170	Connector without rails. Connector for lengthwise linkage – germ guard cannot be hooked in (use Rolltops).
ck-connect air	84 01 11 29	370 x 575 x 182	Connector with support rails. For holding varithek® hobs, GN containers and varithek® aircleanbox3d. Bolts on front.
varithek® aircleanbox3d	91 14 01 25	325 x 530 x approx. 250 (without air-intake fitting)  Height approx. 420 (with air-intake fitting)	For insertion in ck-connect air. Connected power: 230 V, 50 Hz/60 Hz, 16 A 100 W Electrical connection: 2 m cable / connector Incl. odour filter (order no. 91 14 02 68 activated carbon filter) and grease filter (order no. 91 14 02 69 stainless steel mesh) and connection cable (order no. 91 14 02 70) Weight (with air-intake fitting) 10 kg
ck splash guard	84 01 11 31		All-round stainless steel splash guard, closed on three sides, fits ck-port, ck-connect, and ck-connect air.
ck-airflow	84 01 11 34		Stainless steel air baffle for insertion in ck splash guard and the aircleanbox3d air-intake fitting
solution set airbox	84 01 12 39		Comprising: order no. 84 01 11 29 ck-connect air order no. 91 14 01 25 varithek® aircleanbox3d order no. 84 01 11 31 ck splash guard order no. 84 01 11 34 ck-airflow
Germ guard 250	84 01 11 33	Mounting plate 370 x 11.5 x 163  Polycarbonate sheet 325 x 8 x 350	For suspension on front of ck-port and connect/connect-air
KS mobile frame	88 14 01 06	490 x 640 x 210	Stainless steel with plastic corner bumpers. 2 plastic swivel casters with brake. Diameter: 125 mm. 2 plastic fixed casters, diameter 125 mm. Weight 5.5 kg
Chopping board 2/3 with juice groove	72 10 05 40	325 x 352 x 20	Plastic, white
Chopping board 1/1 with juice groove	84 19 16 03	325 x 530 x 20	Plastic, white
Rieber transport belt	36 06 01 02	50 x 3500	Black with woven Rieber logo (orange) with plastic clasp. For securing mobile frame, thermoport® and ck-port/connect during transportation, as well as securing varithek® modules (inserted in ck-port/ck-connect) during transportation.
varithek® Ceran hob ck 2800q b 0.8	91 01 01 16	635 x 325 x 75 mm	for insertion in ck-connect or ck-connect air
varithek® Ceran hob ck 2800q b 2.5	91 01 01 15	635 x 325 x 75 mm	for insertion in ck-connect or ck-connect air
varithek® induction hob ik 3600 b 0.8	91 01 02 18	635 x 325 x 75 mm	for insertion in ck-connect or ck-connect air
varithek® induction hob ik 3600 b 2.5	91 01 02 19	635 x 325 x 75 mm	for insertion in ck-connect or ck-connect air
Cooling pellet GN 1/1, plastic	85 02 20 38 orange 85 02 20 67 black		
Heat pellet GN 1/2, stainless steel	89 08 01 71		